




ALLOY CHAIN - GRADE 100

Model	Chain Size Inches	Working Load Limit *(Lbs)	OD	E	H	Weight 100 ft. (Lbs)
KLA-8-10	5/16"	5,700	0.32	0.95	0.45	97
KLA-10-10	3/8"	8,800	0.40	1.2	0.58	151
KLA-13-10	1/2"	15,000	0.52	1.5	0.72	253
KLA-16-10	5/8"	22,600	0.63	1.9	0.87	450

*Design factor 4




MASTER GRAB TYPE MG

An all in one fitting, combining master link, connector and shortening function for single leg sling.

Model	Chain Size Inches	Working Load Limit *(Lbs)	L (In)	A	B	H	Weight Each (Lbs)
MG-8-10	5/16"	5,700	6.7	3.7	2.4	0.71	2.2
MG-10-10	3/8"	8,800	8.3	4.6	3.0	0.87	4.0
MG-13-10	1/2"	15,000	10.3	5.6	3.5	1.0	7.7
MG-16-10	5/8"	22,600	12.2	6.4	4.1	1.2	12.8

*Design factor 4




MASTER GRAB DUAL TYPE MGD

An all in one fitting, combining master link, connector and shortening function for a two leg sling.

Model	Chain Size Inches	Working Load Limit *(Lbs) at 60°	L (In)	A	B	H	Weight Each (Lbs)
MGD-8-10	5/16"	9,900	6.7	3.9	3.0	0.83	3.1
MGD-10-10	3/8"	15,200	8.3	4.9	3.5	0.95	5.5
MGD-13-10	1/2"	26,000	10.3	5.8	4.1	1.1	11.0
MGD-16-10	5/8"	39,100	12.2	6.9	4.7	1.4	19.6

*Design factor 4




OBLONG MASTER LINK - MF


For 1, 2, 3, or 4 leg chain slings when used with C-Grab and C-Lok connectors

Model	Trade Size Inches	1-Leg 90°	Working Load Limit *(Lbs)	2-Legs 60°	Working Load Limit *(Lbs)	3-4 Legs 60°	Working Load Limit *(Lbs)	L	B	D	Weight Each (Lbs)
MF-86-10	1/2"	5/16"	5,700	-	-	-	-	4.7	2.8	0.55	0.9
MF-108-10	5/8"	3/8"	8,800	5/16"	9,900	-	-	5.5	3.2	0.67	1.5
MF-1310-10	7/8"	1/2"	15,000	3/8"	15,200	5/16"	14,800	6.3	3.7	0.87	3.3
MF-1613-10	1"	5/8"	22,600	1/2"	26,000	3/8"	22,900	7.5	4.3	0.99	4.8
MF-2016-10	1 3/8"	-	-	5/8"	39,100	1/2"	39,000	9.4	5.5	1.3	11.2
MF-2220-10	1 1/2"	-	-	-	-	5/8"	58,700	9.8	5.9	1.5	15.9

*Design factor 4



SEE WARNINGS AND USE LIMITATIONS

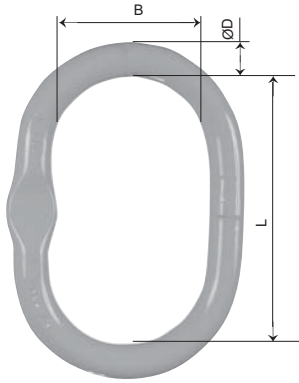


OBLONG MASTER LINK - MFX OVERSIZED FOR LARGE CRANE HOOKS

For 1 or 2 leg chain slings when used with C-Grab and C-Lok connectors

Model	Trade Size Inches	1-Leg 90°	Working Load Limit *(Lbs)	2-Legs 60°	Working Load Limit *(Lbs)	L	B	D	Weight Each (Lbs)
MFX-108-10	1"	5/16"	5,700	-	-	13.4	7.1	0.99	8.2
MFX-108-10	1"	3/8"	8,800	5/16"	9,900	13.4	7.1	0.99	8.2
MFX-1310-10	1 1/8"	1/2"	15,000	3/8"	15,200	13.4	7.1	1.1	10.4
MFX-1613-10	1 3/8"	5/8"	22,600	1/2"	26,000	13.4	7.1	1.3	15.4
MFX-1916-10	1 1/2"	-	-	5/8"	39,100	13.4	7.1	1.5	19.6

*Design factor 4

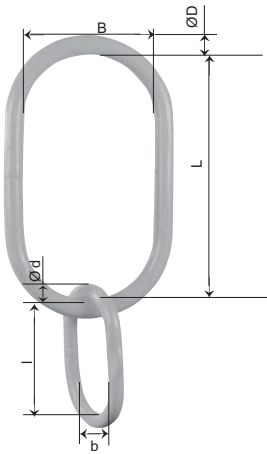


OBLONG MASTER LINK - MTX OVERSIZED FOR LARGE CRANE HOOKS

For 3 or 4 leg chain slings when used with C-Grab and C-Lok connectors

Model	Trade Size Inches	3-4 Legs 60°	Working Load Limit *(Lbs)	L	B	D	l	b	d	Weight Each (Lbs)
MTX-8-10	1 1/8"	5/16"	14,800	13.4	7.1	1.1	6.3	3.7	0.87	13.7
MTX-10-10	1 3/8"	3/8"	22,900	13.4	7.1	1.3	7.9	4.7	1.2	23.1
MTX-13-10	1 1/2"	1/2"	39,000	13.4	7.1	1.5	7.9	4.7	1.3	28.4
MTX-16-10**	1 3/4"	5/8"	58,700	13.4	7.1	1.8	-	-	-	30.2

*Design factor 4

**Does not require sub assembly




C-GRAB TYPE CG

A connecting link used with MF, MFX, or MTX master links to attach one leg of chain.
Can also be used as an adjustable sliding choker.

Fitting includes built-in chain pocket for shortening or creating leg loops

Model	Chain Size Inches	Working Load Limit *(Lbs) at 90°	L	B	E	H	Weight Each (Lbs)
CG-8-10	5/16"	5,700	4.2	0.47	1.3	0.95	1.8
CG-10-10	3/8"	8,800	5.2	0.59	1.6	1.1	3.3
CG-13-10	1/2"	15,000	6.8	0.71	2.0	1.5	7.1
CG-16-10	5/8"	22,600	8.5	0.87	2.5	1.9	13.4

*Design factor 4



C-GRAB DUAL TYPE CGD

A connecting link used with MF, MFX, or MTX master links to attach two legs of chain.
Fitting includes built-in chain pockets for shortening or creating leg loops.

Model	Chain Size Inches	Working Load Limit *(Lbs) at 60°	L	B	E	H	Weight Each (Lbs)
CGD-8-10	5/16"	9,900	4.2	0.47	1.3	1.1	2.9
CGD-10-10	3/8"	15,200	5.2	0.59	1.6	1.5	5.5
CGD-13-10	1/2"	26,000	6.8	0.71	2.0	1.8	12.1
CGD-16-10	5/8"	39,100	8.5	0.87	2.5	2.2	22.5

*Design factor 4



SEE WARNINGS AND USE LIMITATIONS




C-Lok TYPE CL

A connecting link used with MF, MFX, or MTX master links to attach one leg of chain.
The C-Lok can also be used at the bottom of a sling as a sliding choker.

Model	Chain Size Inches	Working Load Limit *(Lbs) at 90°	L	B	E	H	Weight Each (Lbs)
CL-8-10	5/16"	5,700	2.3	0.47	1.3	0.95	1.1
CL-10-10	3/8"	8,800	2.9	0.59	1.6	1.1	2.0
CL-13-10	1/2"	15,000	3.8	0.71	2.0	1.5	4.4
CL-16-10	5/8"	22,600	4.7	0.87	2.5	1.9	8.4

*Design factor 4




C-Lok DUAL TYPE CLD

A connecting link used with MF, MFX, or MTX master links to attach two legs

Model	Chain Size Inches	Working Load Limit *(Lbs) at 60°	L	B	E	H	Weight Each (Lbs)
CLD-8-10	5/16"	9,900	2.2	0.47	1.3	1.1	1.8
CLD-10-10	3/8"	15,200	2.8	0.59	1.6	1.5	3.3
CLD-13-10	1/2"	26,000	3.7	0.71	2.0	1.8	7.3
CLD-16-10	5/8"	39,100	4.5	0.99	2.5	2.2	13.2


*Design factor 4



EGKN SLING HOOK

Model	Chain Size Inches	Working Load Limit *(Lbs) at 90°	L	B	G	H	Weight Each (Lbs)
EGKN-8-10	5/16"	5,700	3.7	1.2	0.67	0.87	1.1
EGKN-10-10	3/8"	8,800	4.8	1.6	0.9	1.2	2.2
EGKN-13-10	1/2"	15,000	5.7	1.9	1.1	1.5	4.4
EGKN-16-10	5/8"	22,600	6.7	2.3	1.4	1.8	8.4


*Design factor 4



GG GRAB HOOK (CLEVIS CRADLE TYPE)

Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	Weight Each (Lbs)
GG-8-10	5/16"	5,700	2.2	0.41	0.88
GG-10-10	3/8"	8,800	3.3	0.47	1.8
GG-13-10	1/2"	15,000	3.8	0.63	3.7
GG-16-10	5/8"	22,600	4.9	0.79	6.8


*Design factor 4:1



SEE WARNINGS AND USE LIMITATIONS




OKE FOUNDRY HOOK (EYE TYPE)



Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	E	F	G	H	Weight Each (Lbs)
OKE-7/8-10	5/16"	5,700	4.8	2.5	1.1	0.45	0.79	1.0	1.5
OKE-10-10	3/8"	8,800	5.9	3.0	1.3	0.6	1.0	1.1	2.9
OKE-13-10	1/2"	15,000	7.2	3.5	1.7	0.7	1.3	1.5	6.2
OKE-16-10	5/8"	22,600	8.5	4.0	2.2	0.9	1.6	1.8	10.8


*Design factor 4:1

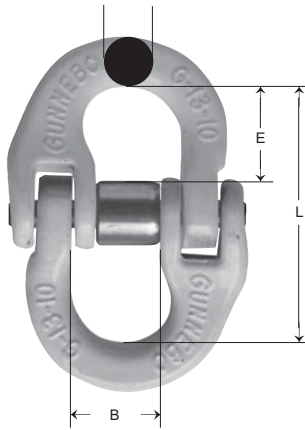

G ALLOY COUPLING LINKS

Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	G	E	Weight Each (Lbs)
G-8-10	5/16"	5,700	2.2	0.71	0.35	0.87	0.44
G-10-10	3/8"	8,800	2.7	0.98	0.47	1.0	0.66
G-13-10	1/2"	15,000	3.5	1.1	0.59	1.3	1.5
G-16-10	5/8"	22,600	4.1	1.4	0.75	1.6	2.6


*Design factor 4:1

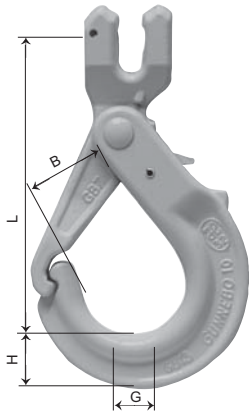

GBK SELF LOCKING HOOK

Model	Chain Size Inches	Working Load Limit *(Lbs) at 90°	L	B	G	H	Weight Each (Lbs)
GBK-8-10	5/16"	5,700	4.7	1.5	0.79	0.87	1.8
GBK-10-10	3/8"	8,800	5.9	1.9	0.94	1.1	2.9
GBK-13-10	1/2"	15,000	6.8	2.1	1.1	1.4	5.3
GBK-16-10	5/8"	22,600	8.5	2.4	1.5	2.0	12.3

*Design factor 4

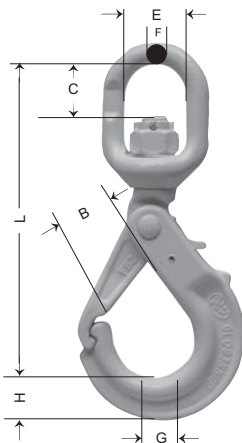

LBK SWIVEL EYE GRIP LATCH SELF-LOCKING HOOK (WITH BRONZE BUSHING)

Model	Chain Size Inches	Working Load Limit *(Lbs)	L	B	C	E	F	G	H	Weight Each (Lbs)
LBK-7/8-10	5/16"	5,700	6.9	1.5	1.1	1.5	0.47	0.79	0.87	1.8
LBK-10-10	3/8"	8,800	8.4	1.9	1.4	1.7	0.59	0.87	1.1	4.0
LBK-13-10	1/2"	15,000	9.3	2.1	1.9	1.9	0.75	1.1	1.4	8.4

*Design factor 4:1



SEE WARNINGS AND USE LIMITATIONS