




BRIDLE AND MULTI-LEG WEB SLINGS

WEB BRIDLE SLING ADVANTAGES


- ◆ Lightweight and easy to handle
- ◆ Do not conduct electricity
- ◆ Help absorb shock
- ◆ Fitting options include, but are not limited to: Rings, hooks, shackles and choker hardware
- ◆ Available in 3 & 4 leg assemblies also.
- ◆ Can be made from either nylon or polyester webbing

CALL US FOR YOUR SPECIFIC NEEDS.

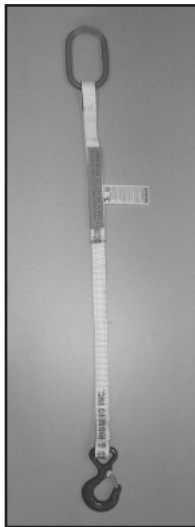

Single Leg (1L)
O-H

Double Leg (2L)
O-H

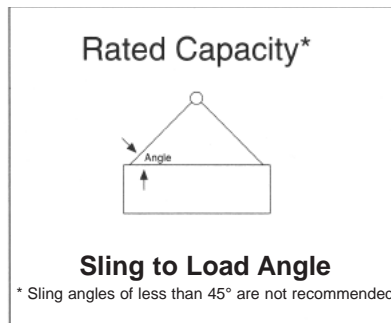

SINGLE LEG STOCK NO.	VERTICAL CAPACITY
1L-171-*-*	1,100
1L-191-*-*	1,550
1L-271-*-*	2,200
1L-291-*-*	3,000
1L-172-*-*	2,200
1L-192-*-*	3,100
1L-272-*-*	4,400
1L-292-*-*	6,000
1L-173-*-*	3,300
1L-193-*-*	4,650
1L-273-*-*	6,600
1L-293-*-*	9,300

Crosby WS-320A Hook Size
1 1/2 Ton
3 Ton
5 Ton

DOUBLE LEG STOCK NO.	75°	60°	45°
2L-171-*-*	2,120	1,900	1,550
2L-191-*-*	3,000	2,680	2,190
2L-271-*-*	4,250	3,810	3,110
2L-291-*-*	5,790	5,190	4,240
2L-172-*-*	4,250	3,810	3,110
2L-192-*-*	5,980	5,370	4,380
2L-272-*-*	8,500	7,620	6,220
2L-292-*-*	11,580	10,400	8,480
2L-173-*-*	6,370	5,720	4,660
2L-193-*-*	8,980	8,060	6,570
2L-273-*-*	12,750	11,440	9,330
2L-293-*-*	17,800	16,000	13,150

* Code designates the top fitting and leg attachment.

O = Oblong Master R = Ring Master P = Pear Master
H = Hook J = J-Hook E = Sling Eye C = Choker Hook